




# JCHI

**AERIAL WORK PLATFORMS**

**Scissor Lifts** 

	GTJZ6A	GTJZ8A	GTJZ10A
最大工作高度 Max. working height (m)	8	10	11.8
最大平台高度 Max. platform height (m)	6.2	8.2	10
机器尺寸 Machine dimensions(L*W*H) (m)	2.07×0.9×2.4	2.07×1.1×2.4	2.55×1.3×2.4
平台尺寸 Platform dimensions(L*W) (m)	1.92×0.9	1.92×1.1	2.4×1.3
平台延伸 Platform extension(m)	0.8	0.8	0.8
额定载荷 Lifting capacity(kg)	250	250	250
平台延伸部分载荷 Extension capacity(kg)	100	100	100
收藏时行走速度 Traveling speed (stowed) (km/h)	3.06	3.06	2.7
升高时行走速度 Traveling speed (raised) (km/h)	0.54	0.54	0.54
爬坡能力 Gradeability(%)	25	25	20
内部转弯半径 Inside turning radius(m)	0.5	0.44	0.6
外部转弯半径 Outside turning radius(m)	2.13	2.26	2.68
平台升高/降低速度 Lifting/lowering speed(m/s)	0.5	0.5	0.5
整机质量 Machine weight(kg)	1507	1820	1993
系统电压 Voltage(V)	24	24	24
轮胎尺寸 Tire(mm)	Φ400*120	Φ400*120	Φ400*120
控制方式 Controls	电控 Electrical	电控 Electrical	电控 Electrical
轮间距 Wheel base(m)	0.9	1.1	1.3
轴距 Axle base(m)	1.7	1.7	2
离地间隙 Ground clearance(mm)	60	60	60
深坑保护装置展开离地间隙 Pothole guard clearance(m)	20	20	20
液压箱容积 Hydraulic tank volume(L)	22	22	22
电机功率 Electromotor power(kW)	2	2	2
电池 Battery	T105/4-6V-209AH	T105/4-6V-209AH	T105/4-6V-209AH

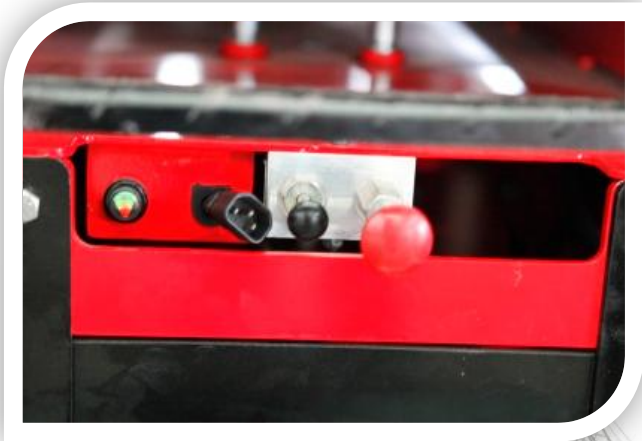



**Beijing Jingcheng Heavy Industry Co. Ltd.**

2, Chuangyeyuan Road,  
Xinghu Industrial Garden, Taihu Town,  
Tongzhou District, 101116, Beijing,  
P. R. China  
Tel: 86 10-6153 9210  
[www.jchic.com](http://www.jchic.com)  
[sales@jchic.com](mailto:sales@jchic.com)



\*Contact us for configuration details and performance.  
JCHI reserves the right to modify specifications without prior notification.