



FEEL SAFE IN THE AIR



GTBZ




GTTY-B



GTS6



AERIAL PLATFORM

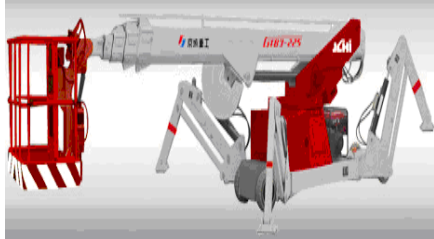

GTBY22S



GTBY



GTWY



GTTY-A



GTTY



GKT



GKTD



Specification	GTBZ24	GTBZ26	GTBZ30	GTBZ32
Max. Working height(m)	25.5	28.3	32.3	33.2
Max. platform height (m)	23.5	26.5	30.5	31.4
Horizontal reach (m)	20.7	23.5	22.5	24
Lift capacity (kg)	230	270	340	230
Platform dimension (L*W*H) (m)	1800x760x1355	1800x760x1355	2400x1340x1355	1800x760x1355
Drive speed - stowed (km/h)	6.4	6.4	4.8	4.8
Drive speed - extended (km/h)	1.1	1.1	1.1	1.1
Gradeability (%)	30(2wd)/40(4wd)	40	40	40
Machine weight (kg)	15500	16900	19900	20400
Machine dimension(LxWxH) (m)	10x2x2.65	11.4x2.5x2.8	12.2x2.5x3.1	12.2x2.5x3.1
Engine	Perkins	Perkins	Cummins	Cummins
Tires size	385/65-22.5	385/65-22.5	385/65-22.5	385/65-22.5
Controls	DC Proportional	DC Proportional	DC Proportional	DC Proportional
Wheelbase - retracted (mm)	2500	2500	2550	2550
Wheelbase - extended (mm)	-	3400	3550	3550
Axle base (mm)	3000	3200	3800	3800
Ground clearance - center (mm)	260	260	260	260

GTBZ


Specification	GTBY10	GTBY14
Max. Working height(m)	11.8	16
Max. platform height (m)	10	14.2
Horizontal reach (m)	3.6	7.8
Outrigger footprints(L*w)(m)	2.8*3	3.8*4.2
Lift capacity (kg)	215	215
Machine dimension-stowed (L*W*H) (m)	5.6*1.2*2	7.5*1.58*2.52
Turnable rotation	360	360
Platform dimension (L*W*H) (m)	1.2*0.6*1.1	1.2*0.8*1.1
Hydraulic tank capacity(L)	20	60
Towing speed(m/s)	<1.5	3
Machine weight(kg)	1200	3810
AC voltage(V)	220	220
Max.lateral force(N)	215	250
Max.wind speed(m/s)	7.9	10.7
Engine power(kw)	1.5	2.2

GTBY



GTTY22S

Specification	GTTY22S
Machine weight(kg)	3850
Lifting capacity	215/100
Max.platform height(m)	18/22
Height stowed(m)	1.9
length-stowed(m)	7.9
Width-stowed(m)	1.6
Drive speed(m/s)	0.1-0.3
Telescopic speed	0.5
Outrigger footprints(L*W)(m)	4.9*4.1
Horizontal reach (m)	12
Platform dimension (L*W*H) (m)	1.5*0.8*1.1
Max.lateral force(N)	215/100
Axle base (mm)	3
Min.turning radius(m)	8.7
Gradeability (%)	10.5
Turntable rotation	360
Platform rotation	30
Safe working clearance(m)	0.2
Max.wind speed(m/s)	7.9

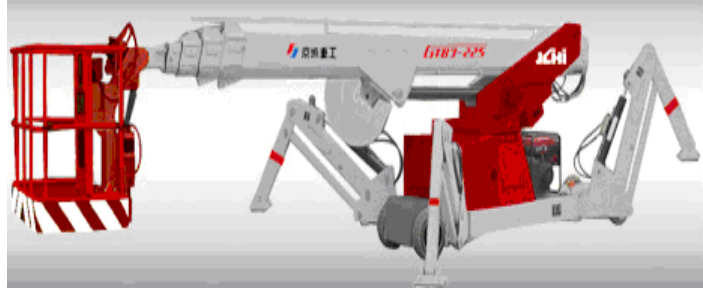

GTWY



Specification	GTWY12	GTWY14
Max. Working height(m)	14	16.3
Max. platform height (m)	12.2	14.5
Machine weight (kg)	590	690
Machine dimension (L*W*H) (m)	3.1*0.74*1.97	3.5*0.74*2.05
Platform dimension(L*W*H) (m)	0.66*0.66*1.11	0.66*0.66*1.12
Outrigger footprints(L*W)(m)	2.4*2.3	2.9*2.9
Lift capacity (kg)	100	100
Electromotor power(kw)	1.5	1.5
Electromotor speed(r/mn)	1400	1400
AC Voltage(V)	220	220



GTS7

Specification	GTS716	GTS718
Max. Working height(m)	16	17.5
Max. platform height (m)	14.2	15.7
Machine weight (kg)	1120	1200
Machine dimension (L*W*H) (m)	1.95x0.9x2.75	1.95x0.9x2.75
Platform dimension (L*W*H) (m)	1.7x0.7x1.1	1.7x0.7x1.1
Outrigger footprints (L*W) (m)	2.5x2.8	2.5x2.8
Lift capacity (kg)	250	150
Electromotor power (kw)	1.5	1.5
Electromotor speed (r/min)	1400	1400
AC Voltage (V)	220	220





GTS6

Specification	GTS6KJ08	GTKS6KJ08	GTS6KJ11
Max. Working height(m)	8.1	9.5	11
Max. platform height (m)	6.3	7.7	9.2
Machine weight (kg)	270	300	30
Machine dimension (L*W*H) (m)	1.12*0.69*2.00	1.12*0.69*2.01	1.37*0.76*2.00
Platform dimension (L*W*H) (m)	0.6*0.6*1.10	0.6*0.6*1.11	0.66*0.66*1.10
Outrigger footprints(L*W)(m)	1.66*1.46	1.66*1.47	2.2*2.0
Lift capacity (kg)	100	100	100
Electromotor power(kw)	0.75	0.75	1.5
Electromotor speed(r/mn)	1400	1400	1400
AC Voltage(V)	220	220	220



GTTY-A

Model	Platform Max Height (m)	Overall Size(m)	Load Capacity (kg)	Rising Speed (m/s)	Platform Size(m)	Motor Power (kw)	Voltage(v)	Weight (kg)
GTTY-6A	6	1.02X0.85X1.80	200	0.054	0.75x0.75	1.1	220	480
GTTY-8A	8	1.16X0.92X2.05	200	0.044	0.8x0.8	1.1	220	580
GTTY-10A	10	1.16X1.00X2.14	200	0.04	0.8x0.8	1.1	220	650
GTTY-12A	12	1.36X1.15X2.23	200	0.03	0.8x0.8	1.1	220	850
GTTY-14A	14	1.40X1.23X2.30	200	0.028	0.8x0.8	1.1	220	980
GTTY-15A	15	1.40X1.23X2.30	200	0.026	0.8x0.8	1.1	220	1100

GTTY-B



Model	Platform Max Height (m)	Overall Size(m)	Load Capacity (kg)	Rising Speed (m/s)	Platform Size(m)	Motor Power (kw)	Voltage(v)	Weight (kg)
GTTY-16B	16	1.70x1.39x2.36	200	0.036	0.08x0.08	1.5	220	1350
GTTY-18B	18	1.78x1.47x2.65	200	0.036	0.08x0.08	1.5	220	1430
GTTY-20B	20	1.78x1.56x2.65	150	0.042	0.08x0.08	1.5	220	1650
GTTY-21B	21	1.78x1.56x2.75	150	0.04	0.08x0.08	1.5	220	1700
GTTY-22B	22	1.97x1.65x2.70	150	0.035	0.08x0.08	1.5	220	1850
GTTY-23B	23	1.97x1.65x2.80	150	0.03	0.08x0.08	1.5	220	2000
GTTY-25B	25	2.05x1.75x2.95	150	0.03	0.08x0.08	1.5	220	2300


GTTY

Model	Platform Max Height (m)	Size in furled status(m)	Carrying capability(kg)	Lifting speed (m/s)	Platform size(m)	Motor Power (kw)	Voltage(v)	Weight (kg)
GTTY-20	20	2.80x1.45x2.20	150	0.04	0.08x0.08	1.5	220	2350
GTTY-22	22	2.90x1.45x2.25	150	0.04	0.08x0.08	1.5	220	2500
GTTY-24	24	3.00x1.50x2.25	150	0.035	0.08x0.08	1.5	220	2680
GTTY-26	26	3.10x1.50x2.30	150	0.03	0.08x0.08	1.1x2	220	2800
GTTY-28	28	3.20x1.55x2.30	150	0.03	0.08x0.08	1.1x2	220	3000

Specification	GKT-14	GKTD-14
Max.platform height(m)	10.5	12
Horizontal reach (m)	3.4	3.4
Lift capacity (kg)	160	200
Machine weight (kg)	1600	1900
Jib lifting speed	0.05-0.09	0.5M/S
Working pressure of System	10	10MPA
Drive speed - extended (km/h)	15-30	12km/h
Electromotor power(kw)	*	3

GKTD-14

GKT-14

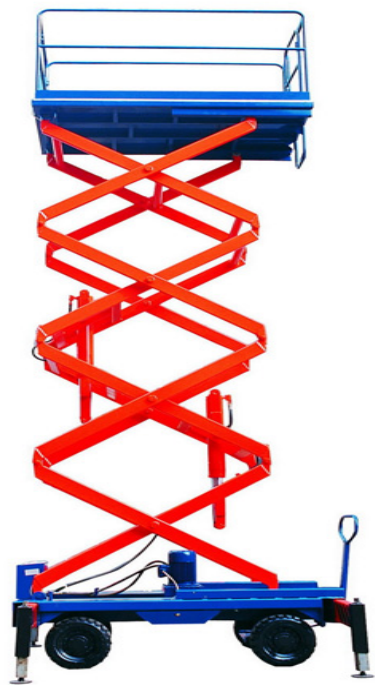

Model	Rated load (kg)	Max height (m/m)	Low height (mm)	Platform size(m/m)	Elevating time	Motor power (kw)	Total Weight
SJY 0.3-3	300	3000	850	1300x850	16	0.55	400
SJY 0.5-4.5	500	4500	980	1300x850	31	0.75	560
SJY 0.3-6	300	6000	950	1780x880	54	0.75	750
SJY 0.5-6	500	6000	950	1780x880	49	0.75	750
SJY 0.5-7.5	500	7500	1400	1800x1000	62	1.1	1150
SJY 0.3-9	300	9000	1350	1800x1000	72	1.1	1200
SJY 0.5-9	500	9000	1550	1800x1002	81	1.1	1260
SJY 1-9	1000	9000	1550	2100x1150	55	2.2	1850
SJY 0.3-11	300	11000	1600	2100x1150	73	1.5	1320
SJY 0.5-11	500	11000	1600	2100x1150	80	1.5	1380
SJY 0.3-12	300	12000	1750	2450x1350	85	2.2	1700
SJY 0.5-12	500	12000	1750	2450x1350	90	2.2	1850
SJY 0.3-14	300	14000	1900	2450x1350	98	2.2	2200
SJY 0.5-14	500	14000	1900	2450x1350	120	2.2	2500
SJY 0.3-16	300	16000	1950	2500x1500	130	3	2600

SCISSOR AERIAL PLATFORM (Manually)

SELF- PROPELLED SCISSOR LIFT

Specification	GTJZ06	GTJZ08	GTJZ10
Max platform height(m)	6.2	8.2	10
Max.working height(m)	8	10	11.8
Overall dimintions(L*W*H)(m)	2.1x0.9x2.2	2.1x1.1x2.4	2.6x1.3x2.4
Platform dimintions(L*W*H)(m)	2.1x0.9x2.2	2.1x0.9x2.4	2.6x1.2x2.4
Platform extensions(m)	0.6	0.6	0.8
Lifting capacity(kg)	250	250	250
Extent ion capacity(kg)	100	100	100
Travelling speed(stowed)(km/h)	3.6	2.88	3.24
Travelling speed(raised)(km/h)	0.7	0.7	0.7
Grade ability (%)	10.5	10.5	10.5
Machine weight(kg)	1500	1820	2200
Controls	Electrical	Electrical	Electrical
Ground clearance(m/m)	60	60	60
Battery	4-6V-245AH	4-6V-245AH	4-6V-245AH



J-7/13 -LOWER GROUND, DLF PHASE -2, GURGAON HARYANA

Tel: 91-124-4009914/15 Fax: 91-124-4056915 Mob: 91-9313927450/76

E-mail: mail@appletree.co.in

Website: www.appletree.co.in

(Please feel free to contact us for any further query)